




# INSTRUCTION SHEET (M)

## 1994 - 2002 Ford Mustang GT/Convertible

### Rear seat bottom

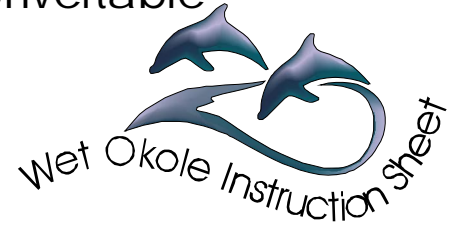


Dear Customer,

As we are not able to assist you in installing your Wet Okole Hawaii water proof seat cover we offer these special instructions for each individual vehicle. On your particular car the rear bench seat has two release buttons. One on each side approximately 14" off to each side of the center of the seat, in between the seat and the carpet. Place a small amount of pressure on the top of the rear seat bottom while pressing one button, and one side of the seat will release. Do the same on the other side and your seat will be ready to install your Wet Okole Hawaii water proof sport seat covers.



#### Step 1

To remove rear seat bottom start from either the right or left hand side of seat bottom. While applying small amount of pressure from the top of the seat bottom press the button located approximately 14" from the side of the seat bottom and seat will release.

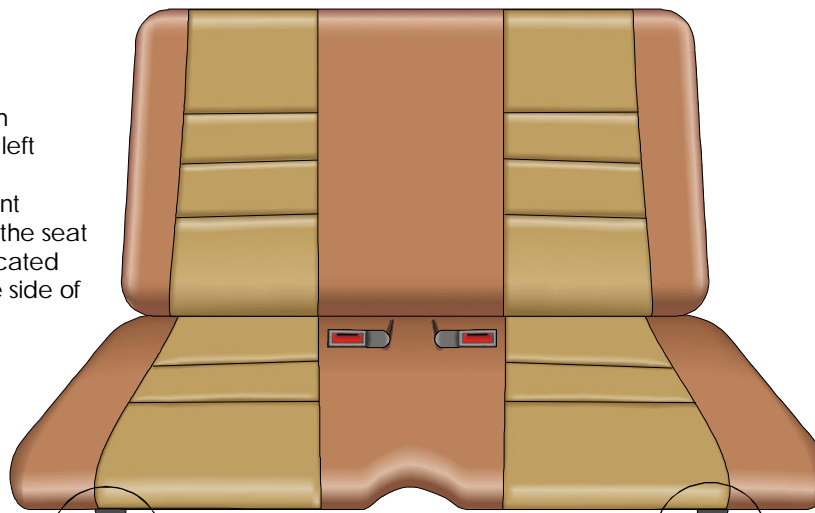

#### Step 2

Once you have released both sides of the seat it is time to install your Wet Okole seat covers. Make sure to run seat belt straps back up the seat bottom after your seat covers are installed.

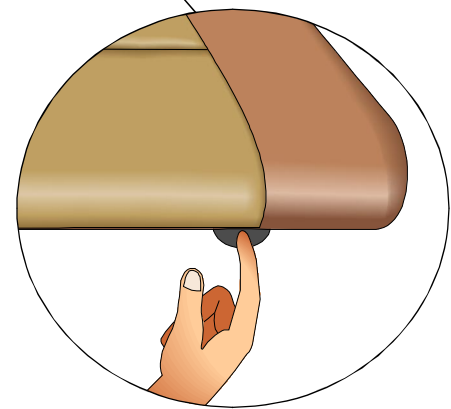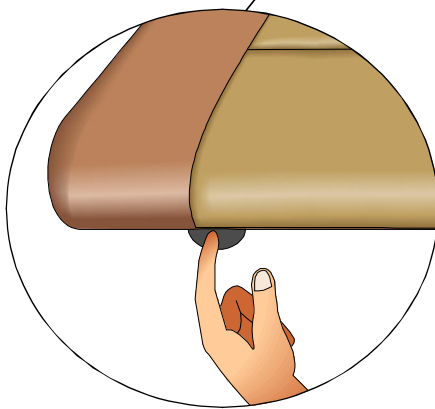

### INSTALLATION QUESTIONS

TECHNICAL ASSISTANT HOT-LINE CALL TOLL FREE 1(888) 24-OKOLE  
MONDAY-SATURDAY 8:00 A.M.-4:30 P.M. PACIFIC TIME.