




INSTRUCTION SHEET (a)

2003 Honda Civic Hybrid/SI/base Rear Bench Installation

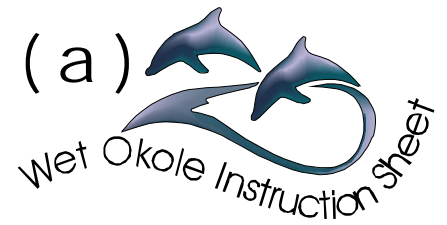

Dear Customer,

As we are unable to assist you on installing your Wet Okole Hi. Waterproof sport seat covers we offer these special instructions. This particular instruction is for the Honda Civic rear bench. Mostly all other vehicles are self explanatory. Any problems please feel free to call for technical support] at 1(888)24-OKOLE. Enjoy your Wet Okole Hawaii Seat Covers!

Step 1A *Pop up front of seat first.*

Step 1B *Next remove 10mm bolt located at rear of seat cushion.*

Before seat cover can be installed on your rear bench seat you need to remove the bottom seat cushion.

Seat

Step 2 Remove the (3) 10 mm bolts located under the back rest. *(Refer to illustration.)*

Step 3 Slide rest straight up and remove. *(Refer to illustration.)*

Note: Back rest needs to be removed on Hybrid models only. On all other models the back rest will fold down.

Rest

Remove the (3) 10 mm bolts located here.

Step 4 Assemble in reverse order.

INSTALLATION QUESTIONS

TECHNICAL ASSISTANT HOT-LINE CALL TOLL FREE 1(888) 24-OKOLE
MONDAY-SATURDAY 8:00 A.M.-4:30 P.M. PACIFIC TIME.