


Jeep INSTRUCTION SHEET (m)

2001-Jeep Liberty (Rear Bench)

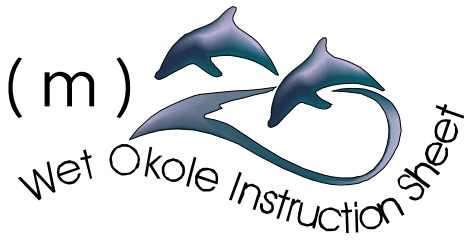


Dear Customer,

As we are unable to assist you on installing your Wet Okole Hi. Waterproof sport seat covers we offer these special instructions. This particular instruction is for the 2001- Jeep Liberty rear seat. Mostly all other vehicles are self explanatory. Any problems please feel free to call for technical support at 1(888)24-Okole. Enjoy your Wet Okole Hawaii Seat Covers!

Prior to installation refer to instruction sheet C for headrest removal.

Step 1

Install seat bottoms by unlatching seat bottom and fold seat cushion upward and install velcro ends of seat covers.

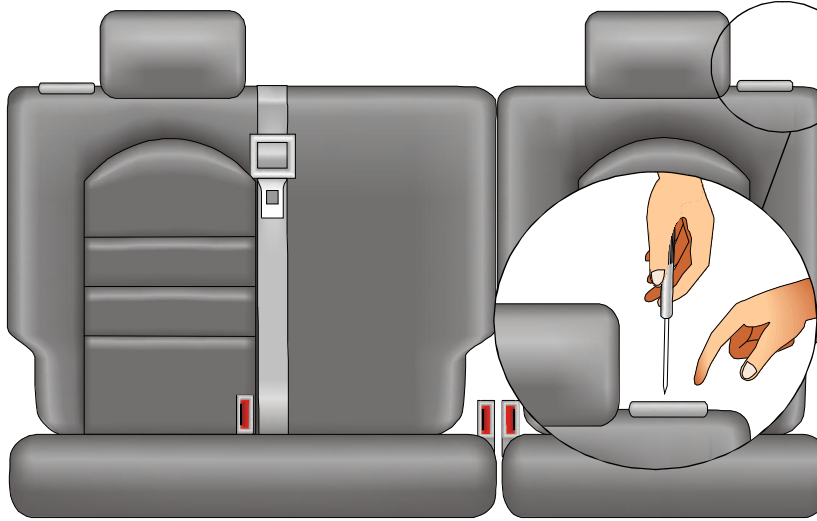


Step 2

Next, for a much cleaner installation remove the plastic latch molding located on the out-board side at the top of each backrest by removing the 2 screws on plastic molding and reattach after backrest cover is installed.

Step 3

Remove storage hooks by removing 3 phillips screws per fixture. (Refer to illustration below.)

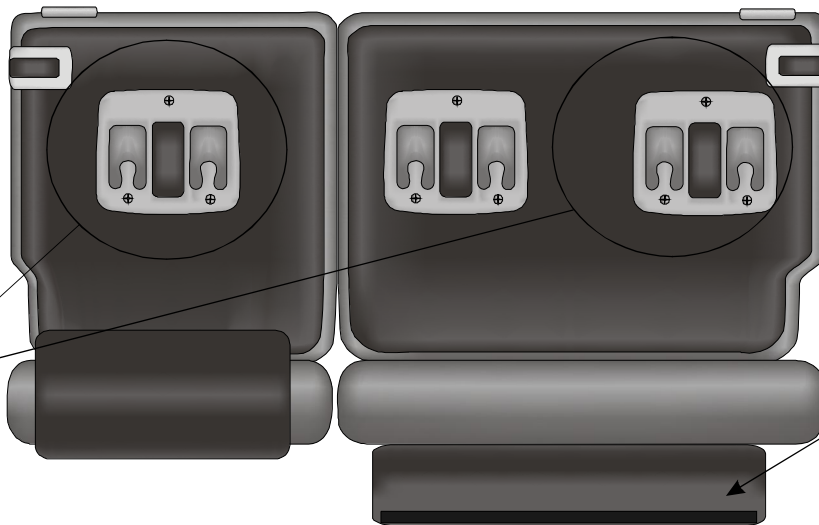

Step 4

Cargo bay carpet is attached to backrest with velcro remove carpet prior to installing backrest seat-cover.

Note: Reattach all plastics after seat-covers are installed.

INSTALLATION QUESTIONS

TECHNICAL ASSISTANT HOT-LINE CALL TOLL FREE 1(888) 24-OKOLE
MONDAY-SATURDAY 8:00 A.M.-4:30 P.M. PACIFIC TIME.

