



Non-Reclining Instruction Sheet (B)

1976-1995 Jeep Wrangler




Dear Customer

As we are unable to assist you in installing your Wet Okole Hi. water proof sport seat covers we offer these special instructions for Non-Reclining Highback Bucket Seats. In Early Model Jeeps, Fords, and Chevrolets some vehicles come with what is called a Highback, Non-Reclining Seat. On these particular seats you cannot put your hand through the crack of the seat, nor does it allow seat cover mounting straps to pass through. On the picture below you will notice the flap that is **Hog Ringed** to the bottom of the seat. These **Hog Rings** have to be removed to install these seat covers. There are two advantages to this procedure. The first advantage with removing this flap is that you will allow dirt, water or whatever from out in between the crack of your seat. This in fact will prevent dirt build-up which in the past had always caused rust and eventually seat failure. The Second Advantage is installing your new Wet Okole Hawaii Seat Covers. Take a pair of wire cutting pliers, grab the middle of the **Hog Ring**, without grabbing any material and twist slowly. This will remove the **Hog Rings**. Everything else is pretty self explanatory. Any problems please feel free to call for technical support. Enjoy your Wet Okole Hawaii Waterproof Sport Seat Covers!



Hog Ring
(actual size)

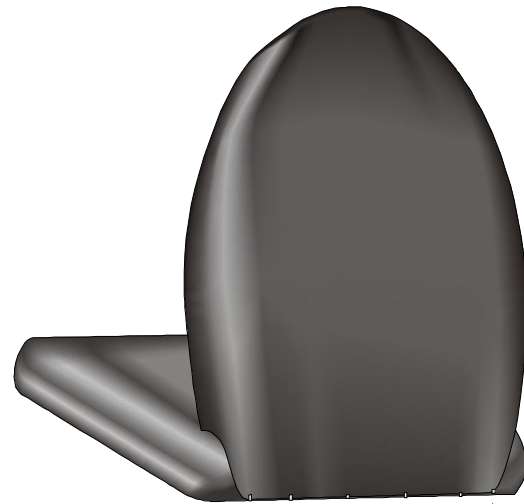

Hog Rings located here

Technical Support *Hot-line* 1-888-24-OKOLE