
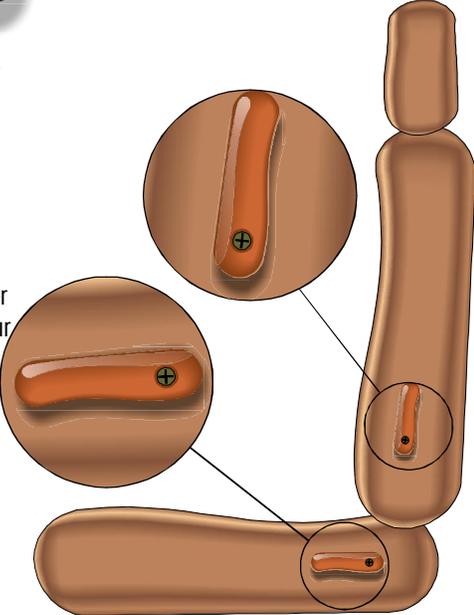
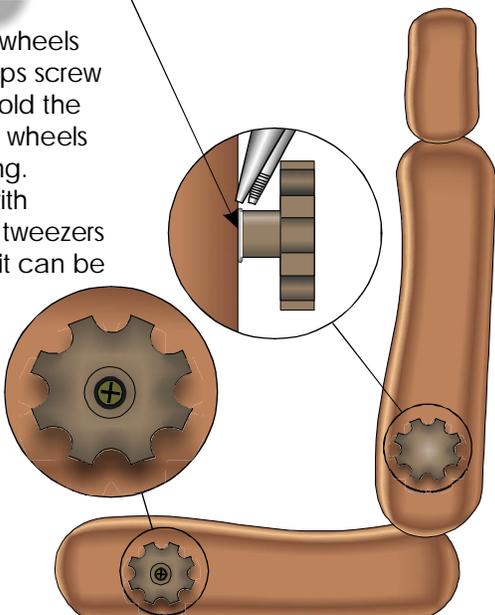
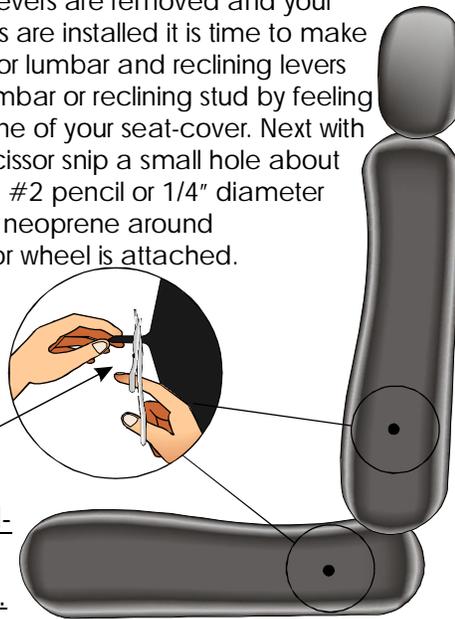


# INSTRUCTION SHEET ( C )

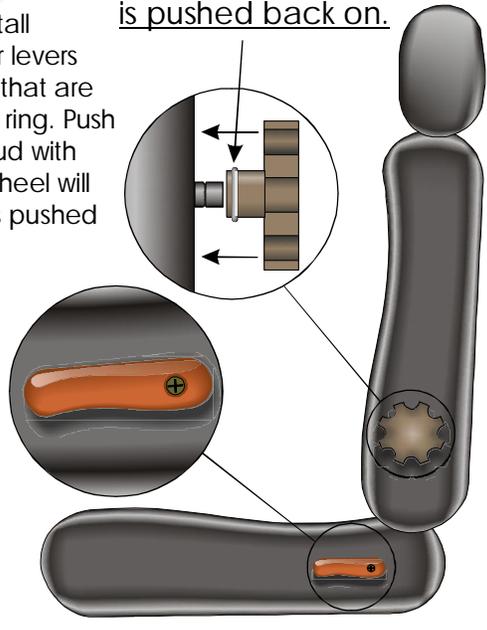

Dear Customer,

As we are unable to assist you on installing your Wet Okole Hi. Waterproof sport seat covers we offer these special instructions. This particular instruction is a universal instruction for lumbar wheels and levers that require holes cut out during installation. Some tools that may be required are a phillips screwdriver, manicuring scissors or razor knife, and needle-nose pliers. Any problems please feel free to call for technical support at 1(888)24-Okole. Enjoy your Wet Okole Hawaii Seat Covers!

<h3>Step 1A</h3> <p>On seats that have levers look for either a phillips screw or a snap ring that hold the lever in place most levers usually have phillips screw. Remove levers with a phillips screwdriver before installing your Wet Okole seat-covers.</p> 	<h3>Step 1B</h3> <p>On seats that have wheels look for either a phillips screw or a snap ring that hold the wheel in place most wheels usually have snap ring. Remove snap ring with a needle-nose plier, tweezers or on some models it can be removed with your thumb.</p> <p><u>Remove snap ring with needle-nose pliers.</u></p> 
<h3>Step 2</h3> <p>After all wheels and levers are removed and your Wet Okole seat-covers are installed it is time to make the holes necessary for lumbar and reclining levers or wheels. Find the lumbar or reclining stud by feeling it through the neoprene of your seat-cover. Next with a small manicuring scissor snip a small hole about the size of a standard #2 pencil or 1/4" diameter hole then, stretch the neoprene around the stud where lever or wheel is attached.</p> <p><u>With a small manicuring scissor or razor knife make a small hole in neoprene no larger than the width of a #2 pencil or 1/4" in diameter.</u></p> 	<h3>Step 3</h3> <p>Next it is time to reinstall your lumbar wheels or levers Note: Lumbar wheels that are attached with a snap ring. Push lumbar wheel onto stud with snap ring in place, wheel will snap in when wheel is pushed on.</p> <p><u>Snap ring is locked in place before wheel is pushed back on.</u></p> 

## INSTALLATION QUESTIONS

TECHNICAL ASSISTANT HOT-LINE CALL TOLL FREE 1(888) 24-OKOLE  
MONDAY-SATURDAY 8:00 A.M.-4:30 P.M. PACIFIC TIME.

Dear Customer,


As we are unable to assist you on installing your Wet Okole Hi. Waterproof sport seat covers we offer these special universal instructions for cutting headrest post holes. Mostly all other vehicles are self explanatory. Any problems please feel free to call for technical support at 1(888)24-Okole. Enjoy your Wet Okole Hawaii Seat Covers!



## Step 1

If your vehicle has removable headrest remove them before you install your seat-covers.


(Step 2) Release mechanism is located in plastic housing. Look for a small hole or button.

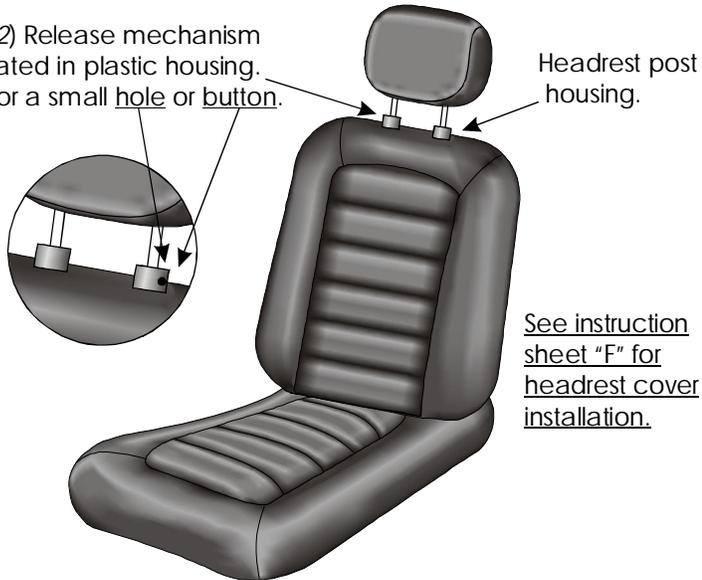

See instruction sheet "F" for headrest cover installation.


## Step 2

After the headrest are removed and your Wet Okole seat-covers are installed it is no time to cut the holes necessary to reinstall your headrest. With your finger find the headrest post hole by running your fingers over the seat cover until the headrest post hole is felt. Next, with a manicuring scissor or razor knife cut a small "X" about the size of a #2 pencil or 1/4" in diameter.

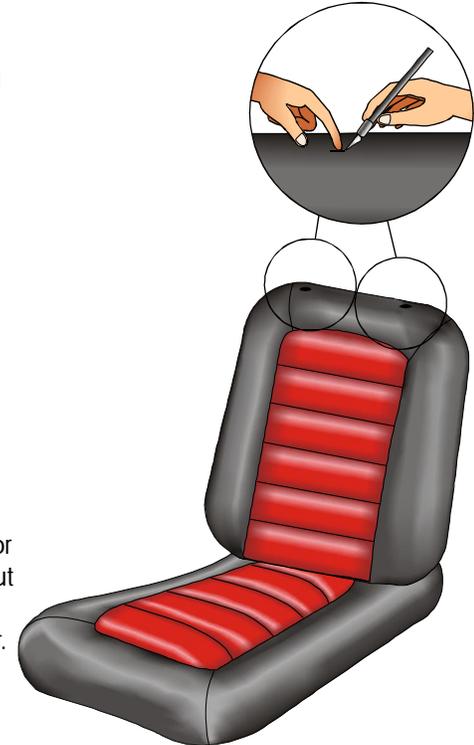

## Step 3

Next, install headrest cover and attach velcro. Your headrest should now slide back into place with a little pressure see illustration.

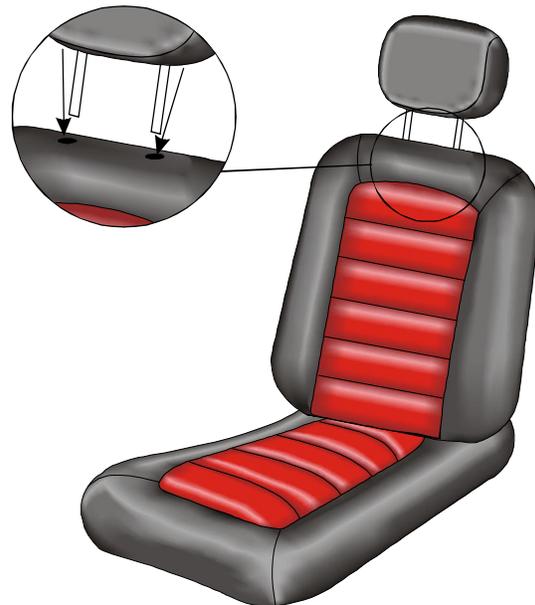

## INSTALLATION QUESTIONS

TECHNICAL ASSISTANT HOT-LINE CALL TOLL FREE 1(888) 24-OKOLE  
MONDAY-SATURDAY 8:00 A.M.-4:30 P.M. PACIFIC TIME.