



INSTRUCTION SHEET (R)




Dear Customer,


1996-2000 Rav 4

As we are unable to assist you on installing your Wet Okole Hi. Waterproof sport seat covers we offer these special instructions. This particular instruction is a universal instruction for Toyota Rav 4 rear bench. Mostly all other vehicles are self explanatory. Any problems please feel free to call for technical support at 1(888)24-Okole. Enjoy your Wet Okole Hawaii Seat Covers!

Side bolsters must be removed prior to seat cover installation.



Side bolsters must be removed prior to seat cover installation.




Hook at top



Clips



Clips

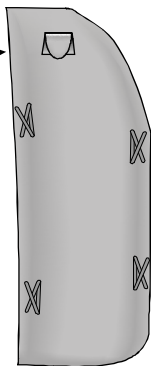

The side bolster in rear must be removed to install the cover. This is done by just pulling out, starting at bottom. It's held with clips like a door panel. There are four clips as shown. At the top it is a hook so once the clips are loose you must lift at top to unhook top. Lift straight up. To put cover on just cut little slits to go over clips. For a much better install, use a little contact cement around edge.

INSTALLATION QUESTIONS

TECHNICAL ASSISTANT HOT-LINE CALL TOLL FREE 1(888) 24-OKOLE
MONDAY-SATURDAY 8:00 A.M.-4:30 P.M. PACIFIC TIME.